
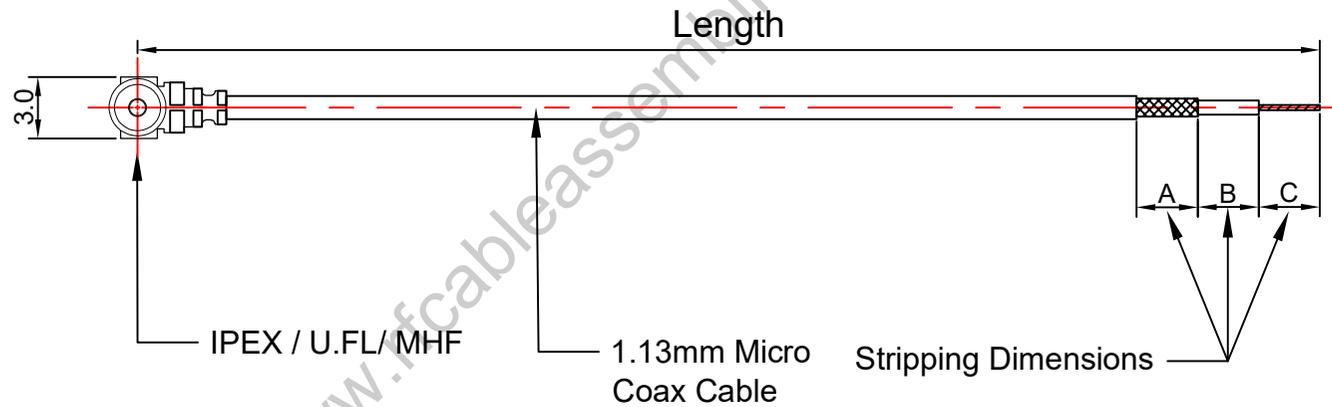


SOMECONN



<https://www.rfcableassemblies.com>

Connector -1	IPEX / U.FL / MHF		
Connector -2	Stripped Tinned Open End	Stripping Dimensions	
Coax Cable	1.13 mm Micro Coax Cable	A	-
Impedance	50 ohm	B	-
Length	-	C	-

DRAWN BY	THIRD-ANGLE PROJECTION 	SOMECONN Shenzhen Someconn Electronics Co., Ltd RF Cable Assemblies & RF Connectors https://www.rfcableassemblies.com	
CHECKED BY	DIMENSIONS ARE MILLIMETERS CABLE LENGTH (L) TOLERANCE: L ≤ 100 = +3 / -0 100 < L ≤ 500 = +4 / -0 500 < L ≤ 1000 = +5 / -0 L > 1000 = +1.5% / -0	Part Number	SC-MC113-IPEX-STRIPPED
APPROVED BY		Title	IPEX to Stripped lead cable with 1.13 mm Micro Coax Cable
		Rev: A	Scale: N/A Sheet: 1/1